


- Quick & easy to install
- Crisp White color and slim profile complement any evaporator
- Fits any Minisplit up to 30,000 BTU/hr
- Surface mounts below evaporator, at either end
- Resilient mounting minimizes vibration & noise
- 12 months limited warranty
- Fully potted waterproof electronics





## mini white pump

### A DISCREET BLEND OF FORM AND FUNCTION

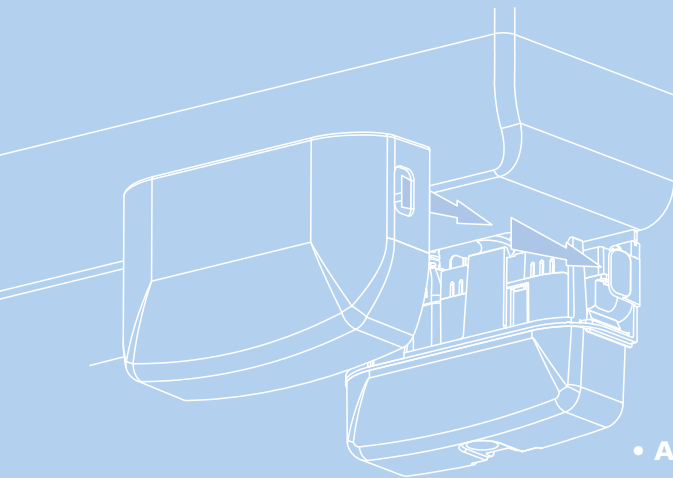

- Self Priming pump, automatically operates on water rise
  - Cleanable replaceable plastic filter cartridge accepts water treatment tablet
  - Handles up to 0.8 GPH @ 33 ft. head
    - Quiet – only 21 dB (A)
    - Available in 230 V AC
  - Volt free N/C contacts kill unit in case of blockage or malfunction
- Accepts standard 3/4" drain hose from any Minisplit
- Extra large reservoir capacity minimizes pump operation
- All components clip apart for easy disassembly without tools
  - Captive float cannot be lost or wrongly installed
- Power cable has push-in plug for easy wiring and removal
  - No breather tube required
- No need to disturb evaporator to clean filter, reservoir clips out from front for easy removal and replacement
  - Kit includes all components required

## PERFORMANCE GRAPHS

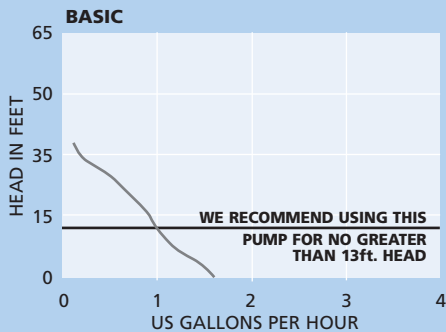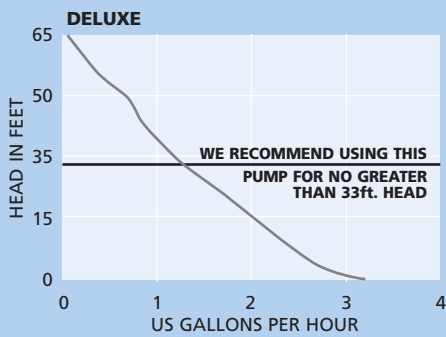

## DIMENSIONS

MODEL	VOLTS AC	HEIGHT	LENGTH	WIDTH	WEIGHT
<b>DELUXE</b>	<b>230</b>	<b>4.5"</b>	<b>7.2"</b>	<b>2.2"</b>	<b>0.1lb</b>
<b>BASIC</b>	<b>230</b>	<b>4.5"</b>	<b>7.2"</b>	<b>2.2"</b>	<b>0.1lb</b>

## KIT INCLUDES

- Complete pump assembly with rubber mounting grommets
- 39" power cable assembly with push-in plug
- Mounting pack with screws, wallplugs & hose clamp
- Warning label
- 1 amp inline fuse
- Installation manual
- Guidelines for correct installation of discharge hosing

## TECHNICAL DATA

### MINI WHITE

Power supply:

**Deluxe:** 220 – 240V AC < 21W

**Basic:** 220 – 240V AC < 11W

1PH 50/60 Hz

3A volt-free Alarm wires, N/C contacts rated @ 5A inductive at 220 – 240V AC

**Deluxe:**

Water flow rate: 3.2 GPH at zero head

Max. recommended head: 33ft

21dB(A) @ 3ft & 33ft head

Push-in plug

**Basic:**

Water flow rate: 1.6 GPH at zero head

Max. recommended head: 13ft

18dB(A) @ 3ft & 13ft head

Hard-wired

Inlet i/d: 3/4"

Discharge tube: 1/4" i/d

Hall effect semi conductor level sensors, with high level safety

Cleanable/replacable 70 micron internal filter

Maximum water temperature: 104°F

Fully potted electronics

Thermally protected

Continuously rated

CE marked

Class II appliance

## SYSTEM LOCATION

Pump can be placed at any point along bottom edge of evaporator where drain hose can exit.

